



Professional Rental

HD LED Display

AVEEN SPR 1.667

Fine Pitch LED Display

AVEEN SPR 1.667

Fine Pitch LED Display



Exclusive **VISUAL FEAST**

Indoor Fixed LED Display

- Ultra HD picture quality
- Low brightness with high gray level
- High contrast and high image quality
- 160° Large viewing angle

Easy realization of Full HD and 4K big screen effect


Display screen can be spliced into any size and any direction, multi-standard video formats are available, easily realize Full HD and 4K video effect; screen performance is unique.

Modular cables free design, plug-and-play power supply

It innovates in designing the power supply and cables as a module, plug and play. Connecting piece is shrapnel-type connector of military level, with the speed increased by 10 times compared with the traditional pin header/female header connector, simple, fast and efficient.

Low brightness with high gray level, more delicate display performance

Adopt high-quality LED blackbody SMD lamp with black mask, the contrast ratio is up to 3000: 1, and the picture is clearer and vivid;

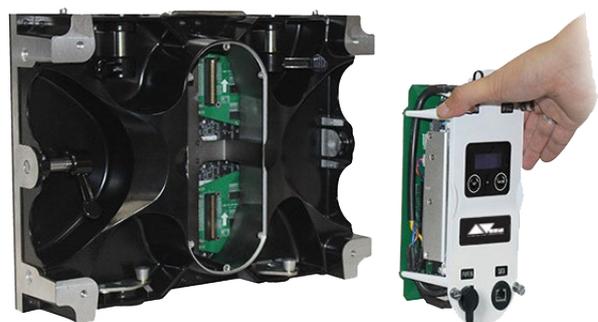

Specifications:

General Specifications

AVEEN SPR 1.667

Model	SPR 1.667
LED Type	1010 black body 3in1 SMD
Pixel Pitch (mm)	1.667
Panel Dimensions (WxHxD)/(mm)	400X300X120
Pixel Per Panel	240×180
Panel Weight (kg)	7.6
Panel Material	Diecasting Aluminum
Module Dimensions (WxH)/(mm)	200×150
Brightness (nit)	800
Color Contrast	3000:1
Refresh Rate (Hz)	3840
Gray scale (bit)	14
Color Temperature (K)	7500
Viewing Angle (H/V) (°)	160/160
Driving Type	1/30
AC Operating Voltage (V)	100~240
Power Consumption (Max./Avg.)(W/m²)	640/215
Storage Temperature (°C)	—40~+60
Operating Temperature (°C)	—10~+40
Storage Humidity (RH)	10% ~90%
Operating Humidity (RH)	10% ~90%
IP Rating (Front/Rear)	IP40/IP21
LED Lifetime (H)	100000
Module Maintenance	Rear

Multifunctional connecting piece,
fast, simple and convenient



Seamless splicing and installation
type to assemble screen freely



Dual signal power supply standby to ensure securer operation

Double signal power supply standby and two-circuit signal input, automatic detection of signal completeness. In case of failure in one power supply, another power supply automatically starts to ensure the normal operation of the display screen.



Receiving card back up



Module back up

Head Quarters

Address : Keizersgracht 241, 1016 EA Amsterdam
Tel # +31202612885

Contact:

Email : info@aveenbv.com
: sales@aveenbv.com
: support@aveenbv.com